


ENERGY SAVING HAND DRYERS




INDUSTRY LEADING HAND DRYER

- **Quick drying:** 10-15 seconds drying time
- **Energy saving:** Uses 80% less energy than conventional hand dryers
- **Hygienic:** HEPA Filtration System proven to remove 99.97% of potential bacteria
- **Durable:** 304 stainless steel one-piece moulded cover
- **Safe:** 45 second cut-off, overtime and over heat protection
- **Intelligent:** Smart Sensor Dryer regulates temperature
 - If the room temperature is higher than 25°C, the dryer blows room temperature air at 550W
 - If the room temperature is below 25°C the dryer blows hot air at 1400W

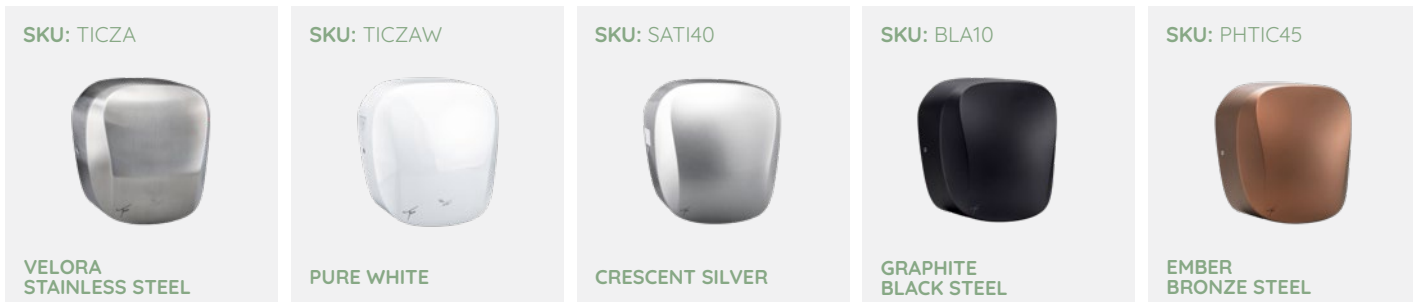

INSTALLATION

Wall mount in bathroom

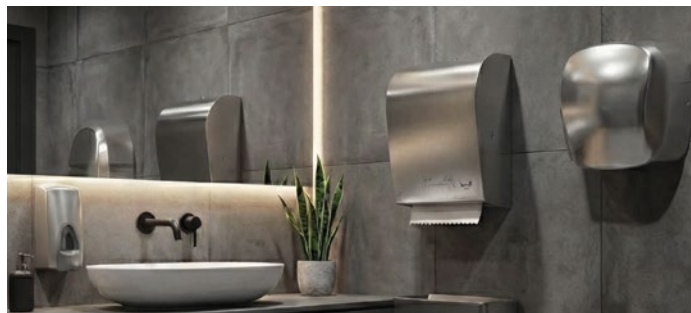

Lead times applicable. Dispensers made to order.

CERTIFICATION

- SABS Tested
- NRCS Approved
- CE/UL approval on electric parts and overtime protection, quality and safe

CONFIGURATION

Frequency:	50Hz/ 60Hz
Voltage:	AC110 - 130V AC220-240V
Rated power:	1400W
Motor power:	550W
Motor type:	Carbon brush motor
Heater type:	Heating wire
Standby power:	<2W
Case material:	304 stainless steel
Colour finish:	Polished
Waterproof:	IPX1

OPERATION

Sensing type:	Touch free infrared
Air speed:	70 m/s
Drying time:	10-15s
Air temperature:	20 - 40°C
Overtime protection:	45s
Sensing distance:	150-200mm
Noise level:	±71 dB@ 1m

LOGISTICS

Dimension (cm):	34.5(L) x 21.5(W) x 36(H)
Shipping weight:	5.2 kilograms

INSTALLATION

- The hand dryer should only be installed by a qualified electrician.
- The minimum distance from the bottom of the dryer to any surface below (counter, basin edge, shelf, etc.) is 400 mm. This clearance is necessary as the sensor detection range is 15-20 cm.

FOR ANY QUERIES PLEASE CONTACT OUR SALES TEAM:

CALL US ON +27 11 455 6307

EMAIL US AT getintouch@nuwkem.co.za

www.nuwkem.co.za

